

DATA SHEET

VBII General Duty Safety Switch

200A, 240V, Fusible, Type 1 and 3R, Series-A Oversized

Standards and Ratings

- UL and CUL Listed under file #E4776
- Meets UL98 for switches and UL 50 for enclosures
- Meets NEMA Standard KS-1 for enclosed switches
- Rated 10,000 AIC with Class H fuses or 100,000 AIC with Class R or T fuses
- Suitable for use as service entrance equipment in the US
- Supports 2020 NEC 230.62 compliance with addition of line side barrier kit (listed as accessory below)

Features

- Quick-make and break switching action
- Double break visible blade design
- Highly visible ON/OFF indication
- Rugged installer friendly enclosure design
- Modular design allows quick and easy replacement of parts
- Single cover interlock



SIEMENS

Product Specifications

General Duty 200A, 240V, Series A Oversized

General Information

Catalog Number	Amps	Volts	Description	Shipping Weight (lbs.)
GF324NRLA	200	240	3 Pole, 4 Wire, Fusible, Outdoor, Oversized	49
GF324NLA	200	240	3 Pole, 4 Wire, Fusible, Indoor, Oversized	49

Horsepower Ratings² – 240 Volts

Catalog Number	1 Phase, 3 Wire 240V AC		3 Phase, 3 Wire 240V AC		250V DC
	Std	Max	Std	Max	
GF324NRLA, GF324NLA	15	—	25	60	40

Mechanical Lug Wire Range (60/75°C, Cu/Al)

Description	Wire Range
Line, Load, Neutral	#6 AWG - 300 Kcmil
Neutral Ground	#14-1/0 AWG
Ground Lug Kit	#14-4 AWG

² Dual horsepower ratings: Std - applies when non-time delay fuses are installed.
Max - applies when time-delay fuses are installed.

³ Internal shield 2020 NEC 230.62 compliant for service entrance equipment.


Accessories

Catalog Number	Description
HG61234	Equipment Ground Lug Kit
HN64	Neutral Kit
HR64	Class R Fuse Clip Kit (3 fuse clips per kit)
ECHS150	1.5", 2", 2.5" Outdoor (3R) Hub
ECHS200	
ECHS250	
HT24	Class T Fuse Clip Kit (1-Pole per kit)
HSK24B ³	Line Side Barrier Kit

Replacement Parts

Catalog Number	Description
HFB64	Fusible Line Side Replacement Base
HBB64	Fusible Load Side Replacement Base
GH24	Replacement Handle/Handle Guard
HM64	Replacement Mechanism
HL64	Replacement Lugs (3 lugs per kit)


General Duty 200A, 240V, Type 1, Oversized

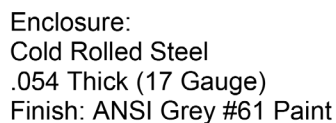

KNOCKOUT CODE	CONDUIT SIZE
A (Tangential)	1.25 1.50 2.00 2.50

Dimension Drawings

General Duty 200A, 240V, Type 3R, Oversized

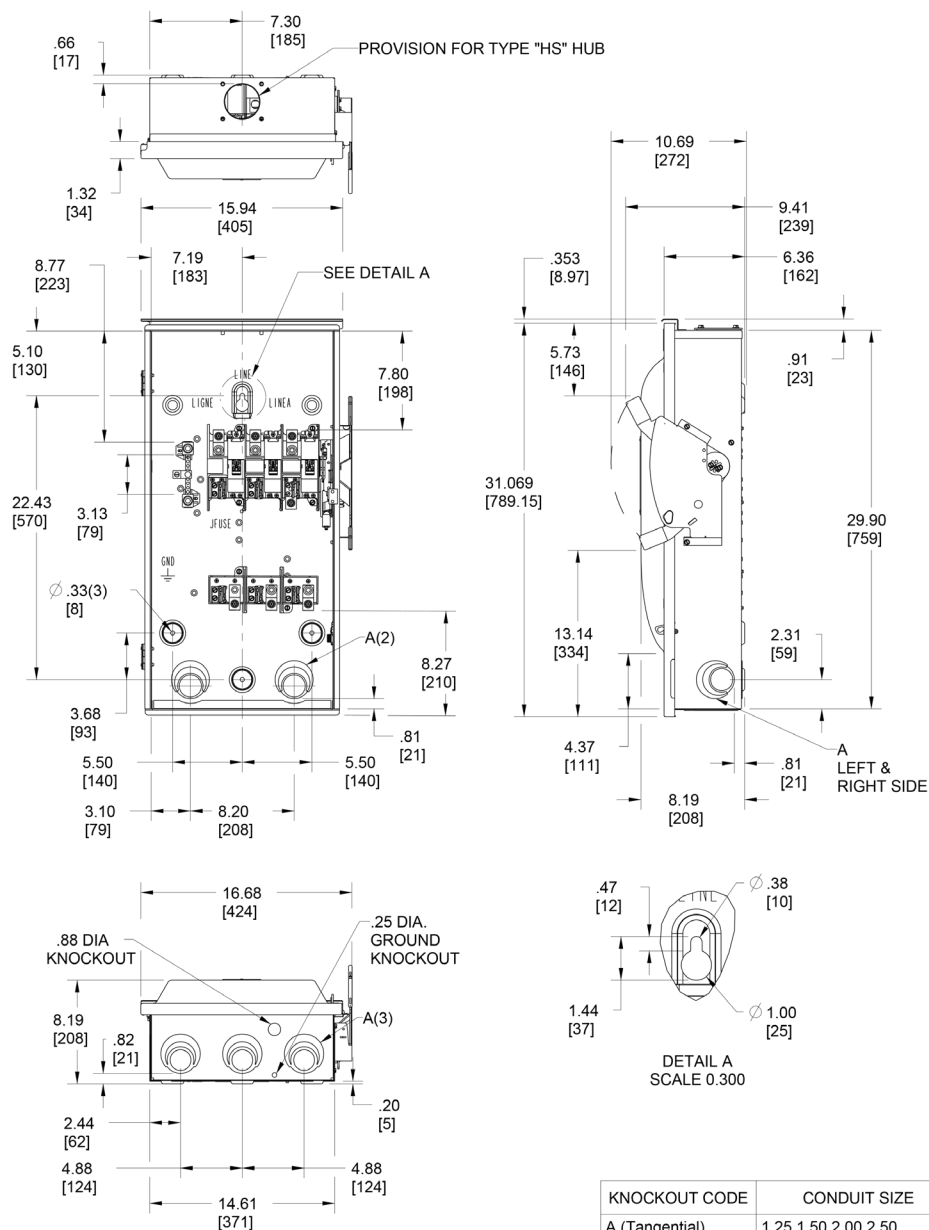

Published by
Siemens Industry, Inc.
3617 Parkway Lane
Peachtree Corners, GA 30092
United States of America

Phone: 1-800-333-7421
usa.siemens.com/switches

Order No.: SSDS-GF20A-1024
Printed in U.S.A.

© 2024 Siemens Industry, Inc.

This document contains a general description of available technical options only, and its effectiveness will be subject to specific variables including field conditions and project parameters. Siemens does not make representations, warranties, or assurances as to the accuracy or completeness of the content contained herein. Siemens reserves the right to modify the technology and product specifications in its sole discretion without advance notice.

SIEMENS